



**LIGHTING  
TECHNOLOGIES  
AUSTRALASIA**  
LED, UCD and Solar  
Advanced Lighting Systems

*Importers and Distributors of  
Advanced Lighting Technology Systems*

**LIGHTING TECHNOLOGIES AUSTRALASIA PTY LTD**


[www.lightingtechnologies.com.au](http://www.lightingtechnologies.com.au)

[info@lightingtechnologies.com.au](mailto:info@lightingtechnologies.com.au)



2012



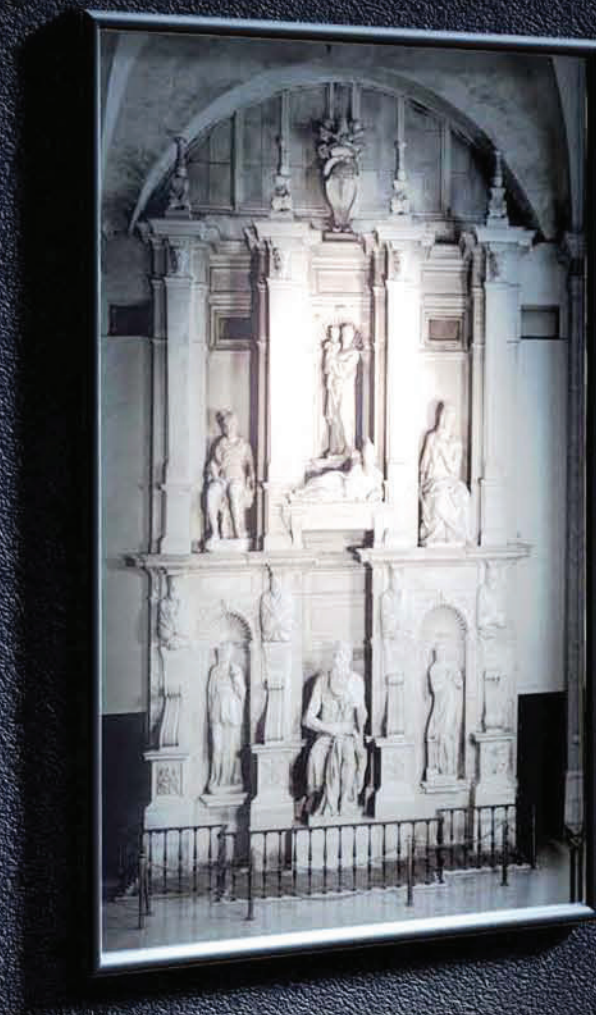

**Lighting Technologies Australasia Pty Ltd** is looking forward to working with customers who are interested in high quality high power LED products. You are always welcome with your inquiries.



**Lighting Technologies Australasia Pty Ltd** is a leading supplier of LED lighting fixtures which integrates R&D, Production, Marketing and Customer Service, all into one First-rate and first-class business.

We have offices in China and United States and supply LED lamps, Track Lights, Recessed Downlights, Spotlights, Floodlights, LED Image Projectors, LED Stage Lighting and many other advanced LED Lights.

Keeping pace with newest LED technology our company consists of engineering team who are forever providing advanced designing concepts as well as skilled workers who can offer professionally designed and build LED lights with both superb quality and competitive pricing.

LTA is forever striving to offer the ultimate in LED lights, customised LED products and exceptional customer service. We value our partnership with our clients



# CONTENTS

Introduction	1~4
--------------	-----

LED Track light	5~16
-----------------	------



LED Recessed Downlight	17~24
------------------------	-------



LED Image Projector	25~28
---------------------	-------



LED Stage lighting	29~30
--------------------	-------



LED Outdoor Lighting	31~34
----------------------	-------



LED Highbay/Lowbay	35~36
--------------------	-------



LED Bulbs	37~42
-----------	-------





# LED Track Light

## Flexible Beam Angle Spotlight

SDS-030

32W/45W



Dimmable

Operational Voltage:AC85V~265V

Color Temperature:2800K~5000K


CRI:Ra=80~90

Intensity of Light Output:2100lm~4100lm





Beam Angle Range:24° ~ 60°

Rating: IP64

White Silver Black

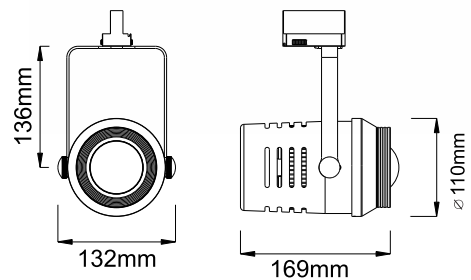

Turn Angle from 24° ~ 60°




SDS-018

45W/60W



Dimmable



Operational Voltage:AC85V~265V




Color Temperature:2800K~5000K

CRI:Ra=80~90

Intensity of Light Output:2130lm~3300lm

Rating: IP64

White Silver Black

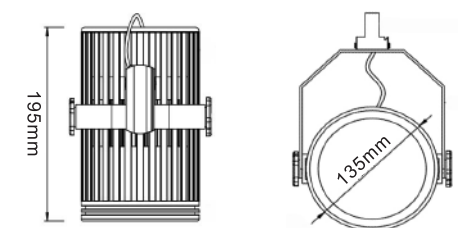

Track light

SDS-018K

45W/60W



Dimmable

Operational Voltage:AC85V~265V

Color Temperature:2800K~5000K

CRI:Ra=80~90

Intensity of Light Output:3300lm~5800lm




Beam Angle Range:26° ~ 60°

Rating: IP64

White Silver Black



Turn Angle from 26° ~ 60°

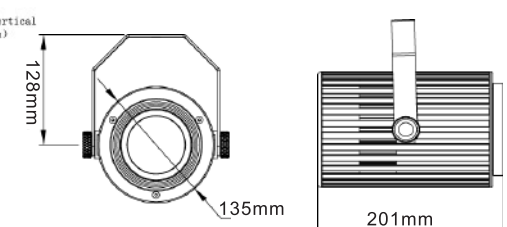






## SDS-022

18W/24W



Dimmable



Operational Voltage: AC85V~265V




Color Temperature: 2800K~5000K

CRI: Ra=80~90

Intensity of Light Output: 680lm~1200lm

Rating: IP64

White Silver Black




## SDS-031

15W/20W/30W



Dimmable



Operational Voltage: AC85V~265V




Color Temperature: 2800K~5000K

CRI: Ra=80~90

Intensity of Light Output: 710lm~1800lm

Rating: IP64

White Silver Black



Turn Angle from 24° ~ 60°

60° ~ 24°

## SDS-022K

15W/20W/30W



Dimmable

Operational Voltage: AC85V~265V

Color Temperature: 2800K~5000K




CRI: Ra=80~90

Intensity of Light Output: 900lm~2200lm

Beam Angle Range: 24° ~ 60°

Rating: IP64

White Silver Black



60° ~ 24°

Turn Angle from 24° ~ 60°

## SDS-031K

15W/20W/30W



Dimmable

Operational Voltage: AC85V~265V

Color Temperature: 2800K~5000K




CRI: Ra=80~90

Intensity of Light Output: 900lm~2200lm

Beam Angle Range: 24° ~ 60°

Rating: IP64

White Silver Black








### SDS-032

15W/20W



Dimmable



Operational Voltage: AC85V~265V




Color Temperature: 2800K~5000K

CRI: Ra=80~90

Intensity of Light Output: 710lm~1100lm

Rating: IP64

White Silver Black

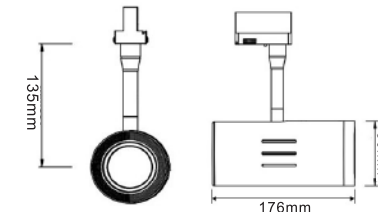

### SDS-032K

15W/20W/30W



Dimmable

Operational Voltage: AC85V~265V

Color Temperature: 2800K~5000K

CRI: Ra=80~90

Intensity of Light Output: 900lm~1800lm





Beam Angle Range: 24° ~ 60°

Rating: IP64

White Silver Black

Turn Angle from 24° ~ 60°

60° ~ 24°

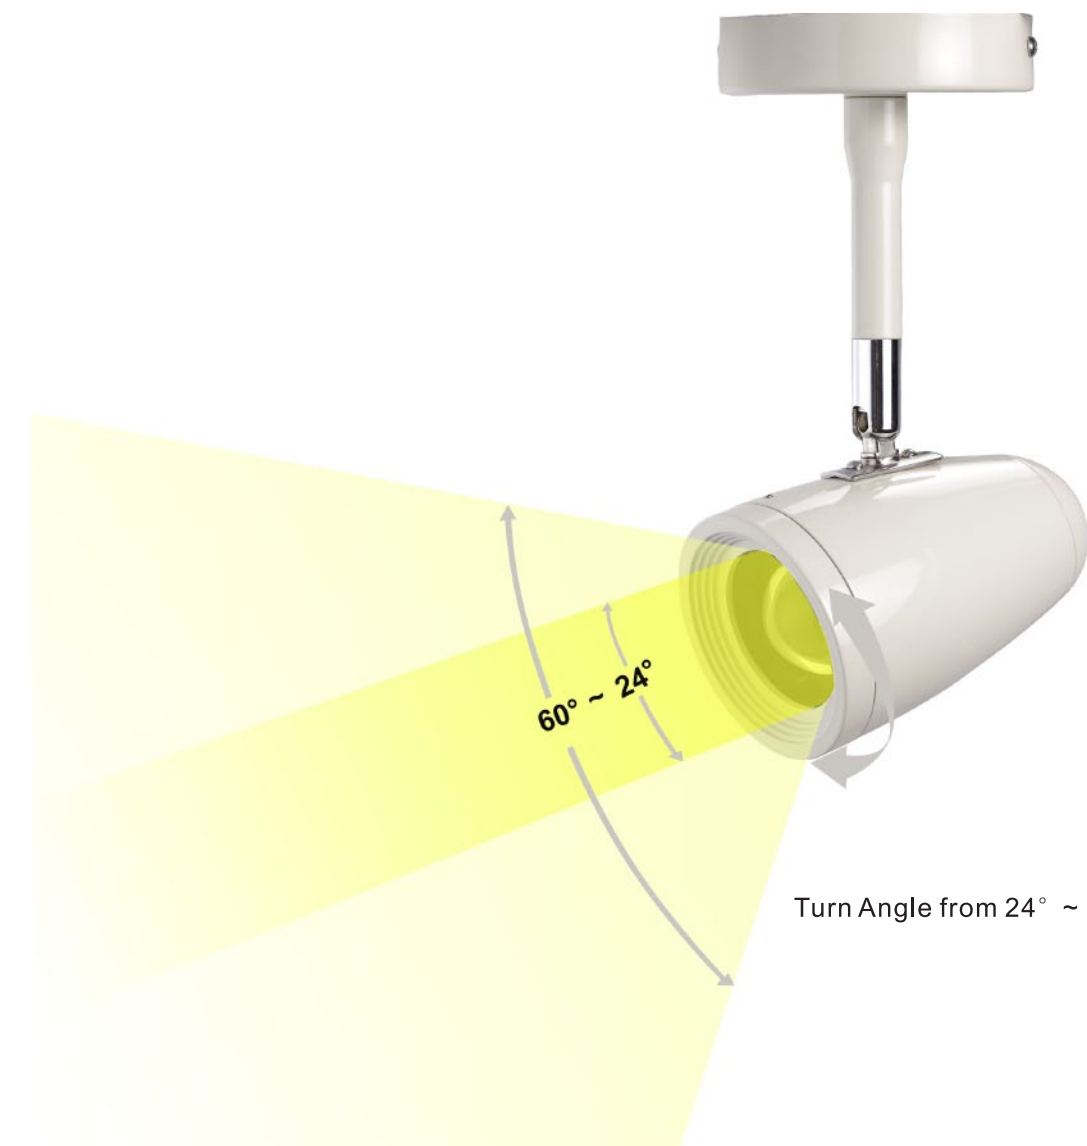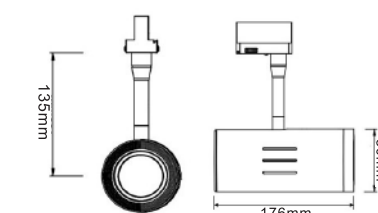

Turn Angle from 24° ~ 60°

### SDS-033K

10W/20W



Dimmable

Operational Voltage: AC85V~265V

Color Temperature: 2800K~5000K




CRI: Ra=80~90

Intensity of Light Output: 710lm~1500lm

Beam Angle Range: 24° ~ 60°

Rating: IP64

White Silver Black

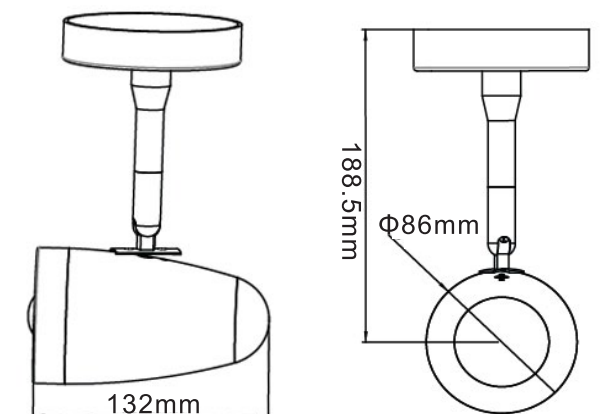






### SDS-016

15W/20W



Operational Voltage: AC85V~265V




Color Temperature: 2800K~5000K

CRI: Ra=80~90

Intensity of Light Output: 710lm~1100lm


Rating: IP64

White Silver Black



### SDS-017

30W/40W



Operational Voltage: AC85V~265V




Color Temperature: 2800K~5000K

CRI: Ra=80~90

Intensity of Light Output: 1420lm~2200lm


Rating: IP64

White Silver Black

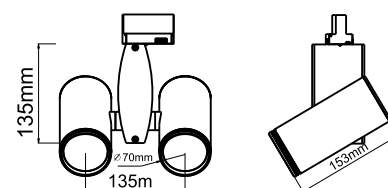

### SDS-019

15W/20W



Operational Voltage: AC85V~265V




Color Temperature: 2800K~5000K

CRI: Ra=80~90

Intensity of Light Output: 710lm~1100lm


Rating: IP64

White Silver Black



### SDS-021

8W



Operational Voltage: AC85V~265V




Color Temperature: 2800K~5000K

CRI: Ra=80~90

Intensity of Light Output: 310lm~400lm

Rating: IP64

White Silver Black








## SDS-023

15W/20W



Dimmable



Operational Voltage: AC85V~265V




Color Temperature: 2800K~5000K

CRI: Ra=80~90

Intensity of Light Output: 710lm~1100lm

Rating: IP64

White Silver Black




## SDS-024

15W/20W



Dimmable



Operational Voltage: AC85V~265V




Color Temperature: 2800K~5000K

CRI: Ra=80~90

Intensity of Light Output: 710lm~1100lm

Rating: IP64

White Silver Black



## SDS-025K

6W/8W



Dimmable

Operational Voltage: AC85V~265V

Color Temperature: 2800K~5000K


CRI: Ra=80~90

Intensity of Light Output: 230lm~400lm

Beam Angle Range: 24° ~ 60°




Rating: IP64

White Silver Black

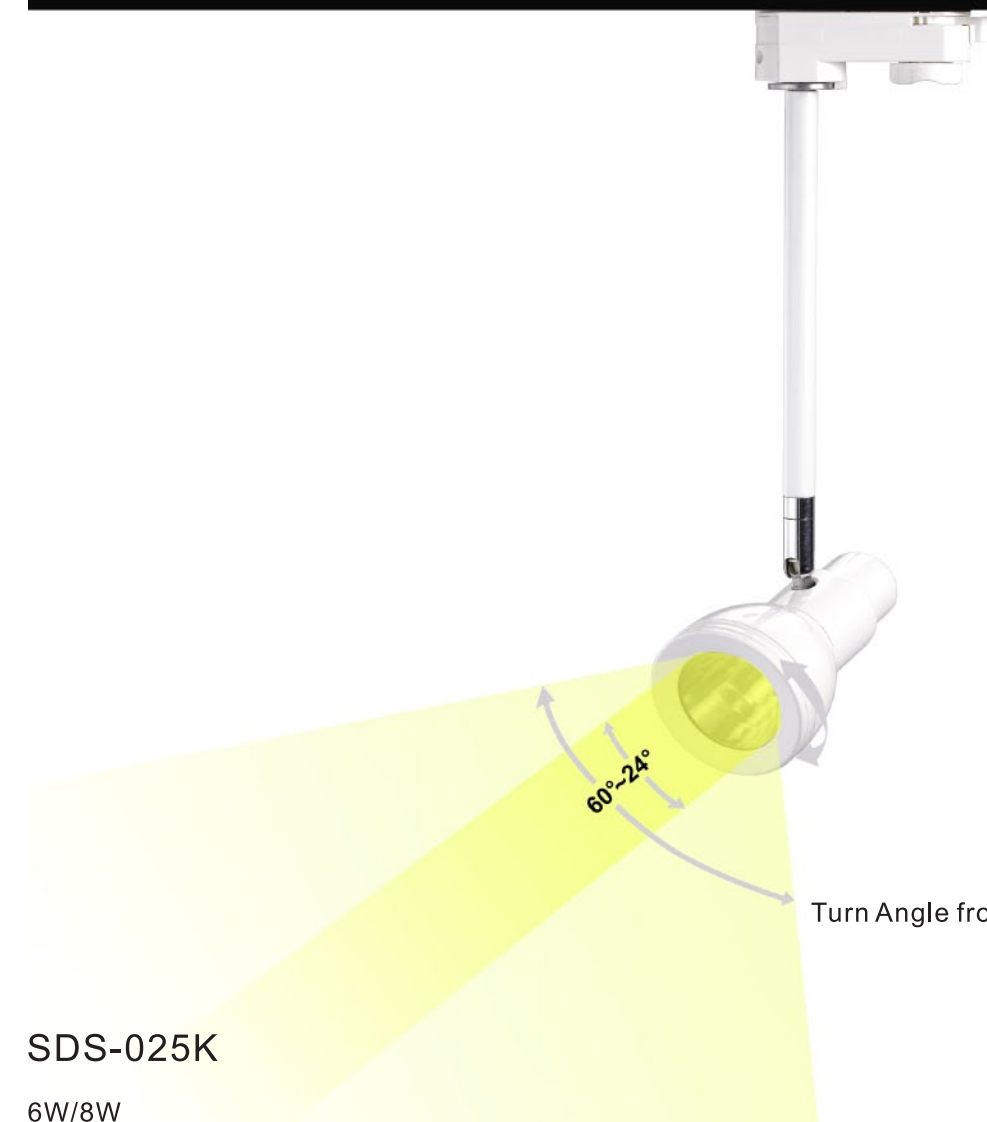

60°-24°

Turn Angle from 24° ~ 60°

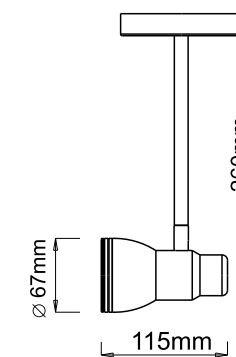






## SDS-026

6W/8W



Dimmable



Operational Voltage: AC85V~265V




Color Temperature: 2800K~5000K

CRI: Ra=80~90

Intensity of Light Output: 230lm~400lm

Rating: IP64

White Silver Black




## SDS-027

15W/20W



Dimmable



Operational Voltage: AC85V~265V




Color Temperature: 2800K~5000K

CRI: Ra=80~90

Intensity of Light Output: 230lm~400lm

Rating: IP64

White Silver Black

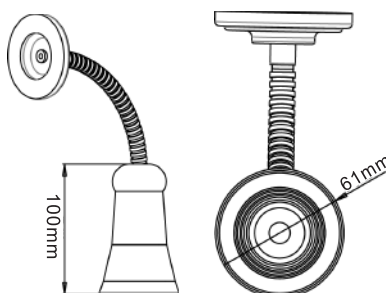


## SDS-028

15W/20W



Dimmable



Operational Voltage: AC85V~265V




Color Temperature: 2800K~5000K

CRI: Ra=80~90

Intensity of Light Output: 710lm~1100lm

Rating: IP64

White Silver Black




## SDS-029

30W/40W



Dimmable



Operational Voltage: AC85V~265V




Color Temperature: 2800K~5000K

CRI: Ra=80~90

Intensity of Light Output: 1420lm~2200lm

Rating: IP64

White Silver Black

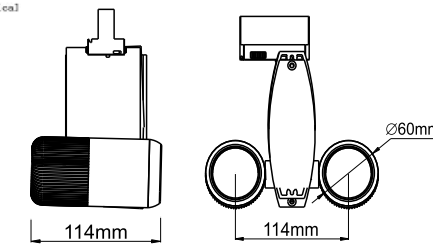



# LED Reccessed DownLight



Aluminum Body


White Silver Black

4''(100mm)



SDR-036

15W/20W






Operational Voltage:AC85V~265V

Color Temperature:2800K~5000K

CRI:Ra=80~90

Intensity of Light Output:710lm~1100lm

Rating: IP64

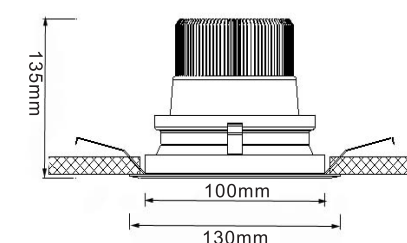


5''(120mm)



SDR-037

15W/20W






Operational Voltage:AC85V~265V

Color Temperature:2800K~5000K

CRI:Ra=80~90

Intensity of Light Output:710lm~1100lm

Rating: IP64

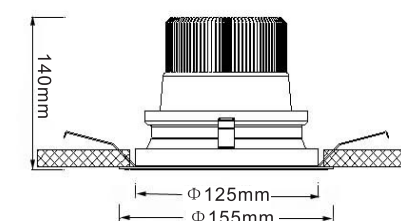



downlight



SDR-039

45W/60W/70W

CE

RoHS




Dimmable

26°

38°

44°

Operational Voltage:AC85V~265V  
Color Temperature:2800K~5000K  
CRI:Ra=80~90  
Intensity of Light Output:2100lm~4800lm  
Rating: IP64



downlight

SDR-038

20W/30W/45W

CE

RoHS

Dimmable

26°

38°

44°

Operational Voltage:AC85V~265V  
Color Temperature:2800K~5000K  
CRI:Ra=80~90  
Intensity of Light Output: 900lm~3400lm  
Rating: IP64



SDR-040

45W/60W/70W

CE

RoHS







Dimmable

26°

38°

44°

Operational Voltage:AC85V~265V  
Color Temperature:2800K~5000K  
CRI:Ra=80~90  
Intensity of Light Output: 2100lm~4800lm  
Rating: IP64

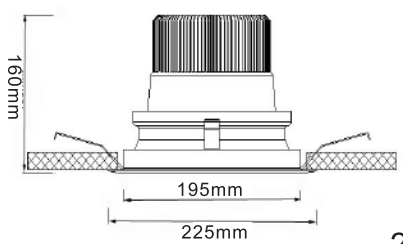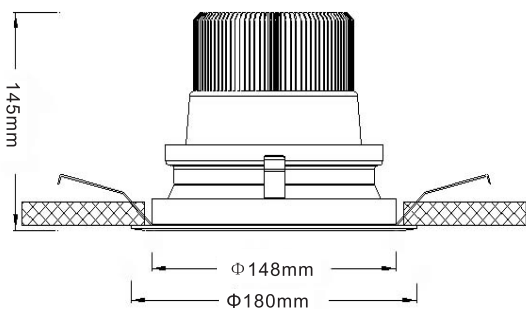









SDR-028

15W/20W




Operational Voltage: AC85V~265V  
Color Temperature: 2800K~5000K  
CRI: Ra=80~90  
Intensity of Light Output: 710lm~1100lm  
Rating: IP64






SDR-029

30W/40W



Operational Voltage: AC85V~265V  
Color Temperature: 2800K~5000K  
CRI: Ra=80~90  
Intensity of Light Output: 1420lm~2200lm  
Rating: IP64






SDR-030

45W/60W



Operational Voltage: AC85V~265V  
Color Temperature: 2800K~5000K  
CRI: Ra=80~90  
Intensity of Light Output: 2130lm~3300lm  
Rating: IP64

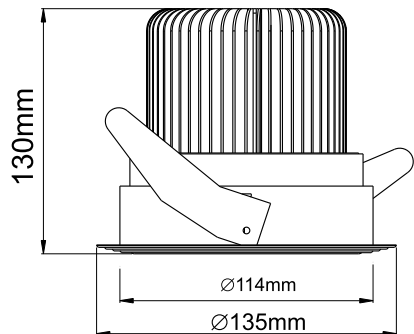



downlight



SDR-031

20W/30W



Dimmable






Operational Voltage:AC85V~265V

Color Temperature:2800K~5000K

CRI:Ra=80~90

Intensity of Light Output:500lm~800lm

Rating: IP64



downlight



SDR-033

30W/60W



Dimmable






Operational Voltage:AC85V~265V

Color Temperature:2800K~5000K

CRI:Ra=80~90

Intensity of Light Output:1300lm~2200lm

Rating: IP64

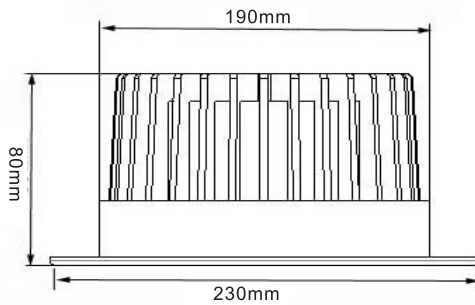

SDR-032

20W/30W



Dimmable






Operational Voltage:AC85V~265V

Color Temperature:2800K~5000K

CRI:Ra=80~90

Intensity of Light Output:500lm~800lm

Rating: IP64

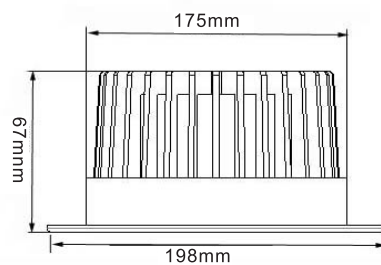




# LED Image Projector




Logo Projection

Cut light



SDG-001

30W/40W/60W



White Silver Black

Operational Voltage: AC85V~265V

Color Temperature: 2800K~5000K



CRI: Ra=80~90

Intensity of Light Output: 1200lm~2900lm



Rating: IP44

Color: White or RGBW

DMX(Optional)

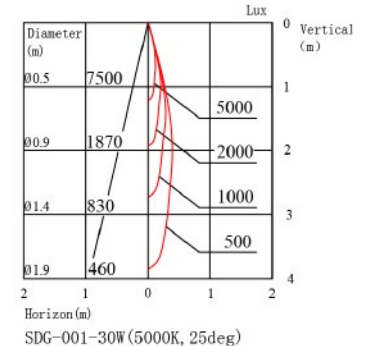

Optical Distribution  
SDG-001-30W-5000K-25°

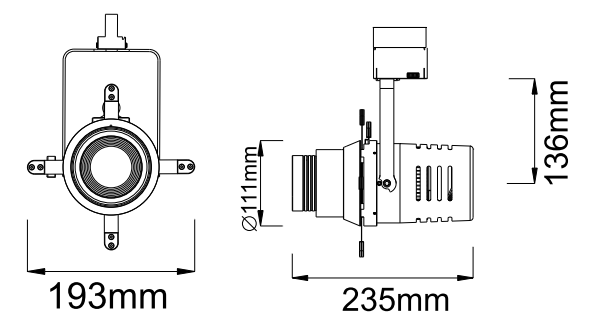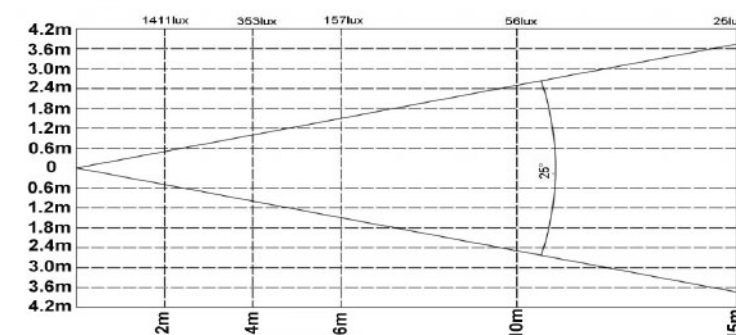





SDG-002




30W/40W/60W



Dimmable

Operational Voltage:AC85V~265V  
Color Temperature:2800K~5000K  
CRI: Ra=80~90  
Intensity of Light Output:1500lm~3500lm  
Rating: IP44  
Color: White or RGBW  
DMX(Optional)

White Silver Black

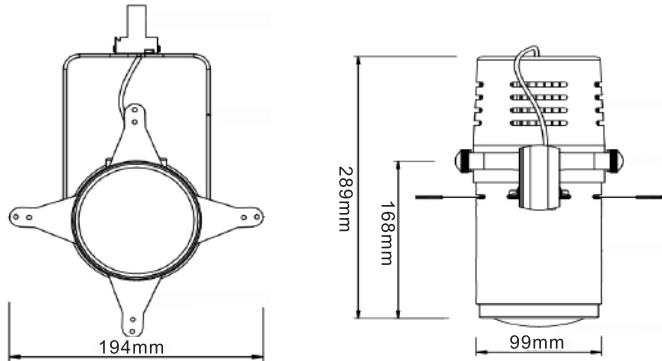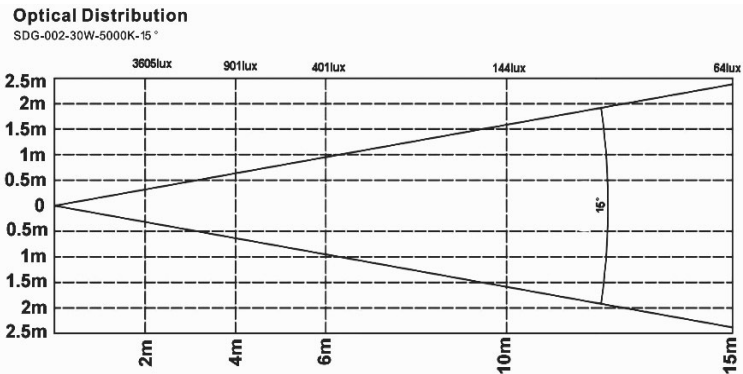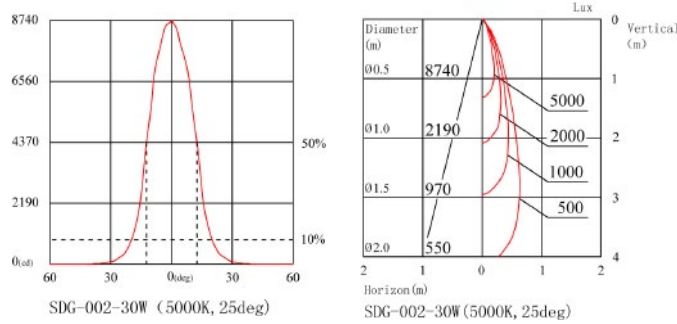

SDG-003




30W/40W/60W



Dimmable

Operational Voltage:AC85V~265V  
Color Temperature:2800K~5000K  
CRI:Ra=80~90  
Intensity of Light Output:1500lm~3500lm  
Rating: IP65  
Color:White or RGBW  
DMX(Optional)

White Silver Black

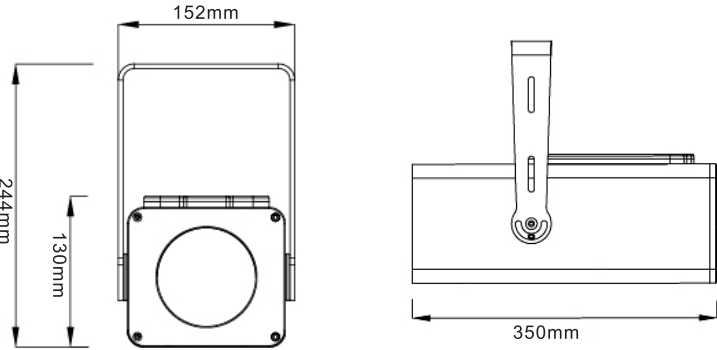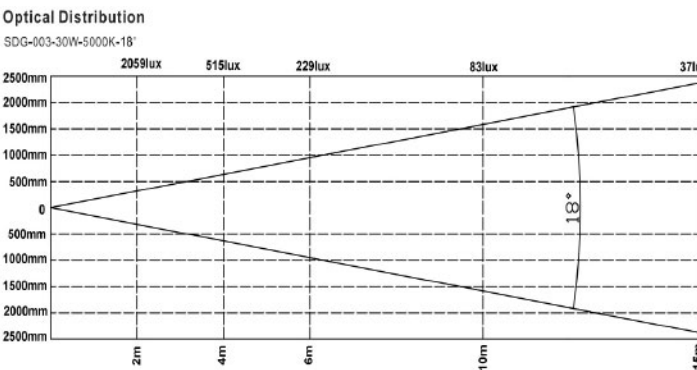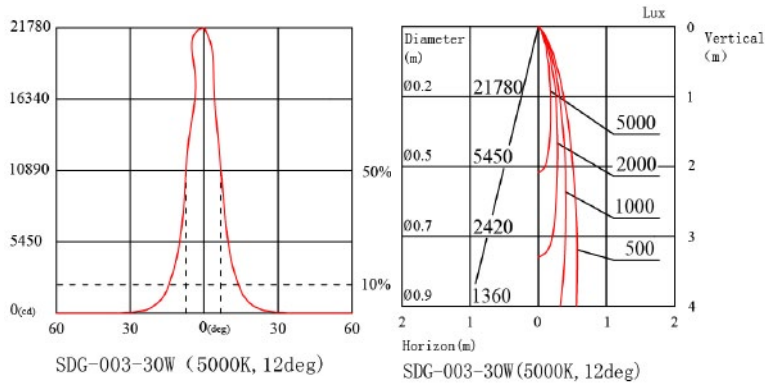



# LED Stage Lighting



stage light



SDT-001



Operational Voltage: AC85V~265V

Color: White or RGB color mixing


Power Consumption: 36\*3W

Beam Angle: 15° / 30° / 60°

Control: DMX512

Rating: IP44

White Silver Black

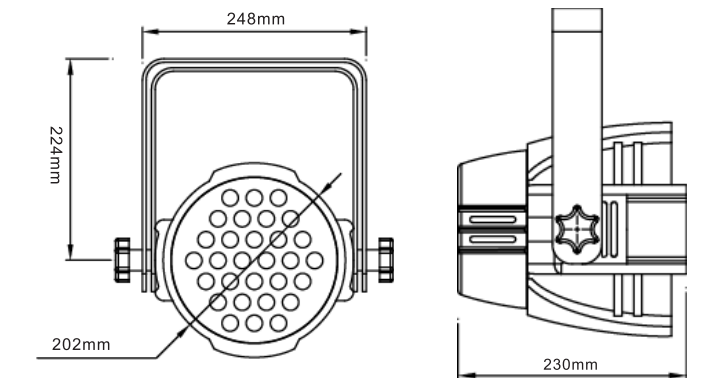

SDT-002



Operational Voltage: AC85V~265V

Color: White or RGB color mixing


Power Consumption: 54\*3W

Beam Angle: 15° / 30° / 60°

Control: DMX512

Rating: IP44

White Silver Black

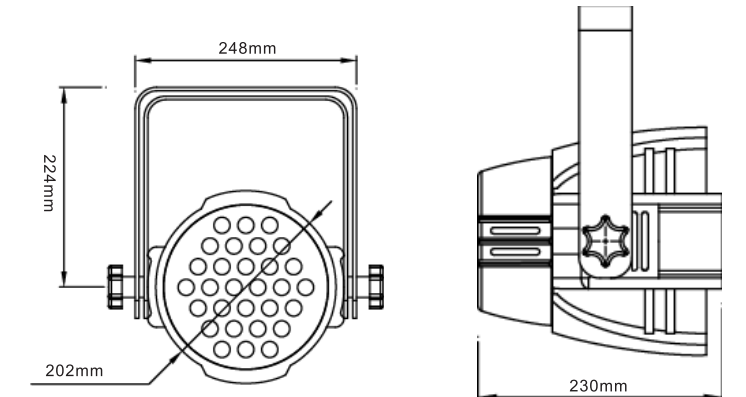

stage light



# LED Outdoor Lighting



outdoor light



SDE-001

45W/60W



Operational Voltage: AC85V~265V




Color Temperature: 2800K~5000K

CRI: Ra=67~80

Intensity of Light Output: 2130lm~4250lm

Rating: IP66

White Black

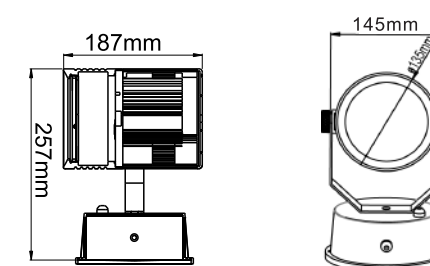

SDE-002

15W/20W



Operational Voltage: AC85V~265V




Color Temperature: 2800K~5000K

CRI: Ra=67~80

Intensity of Light Output: 710lm~1400lm

Rating: IP66

White Black

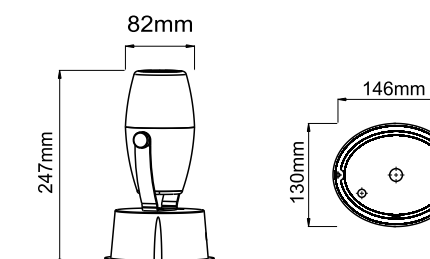

outdoor light





## SDE-003

60W/80W



Dimmable



Operational Voltage: AC85V~265V





Color Temperature: 2800K~5000K

CRI: Ra=67~80

Intensity of Light Output: 2800lm~5700lm

Rating: IP66

White Silver Black

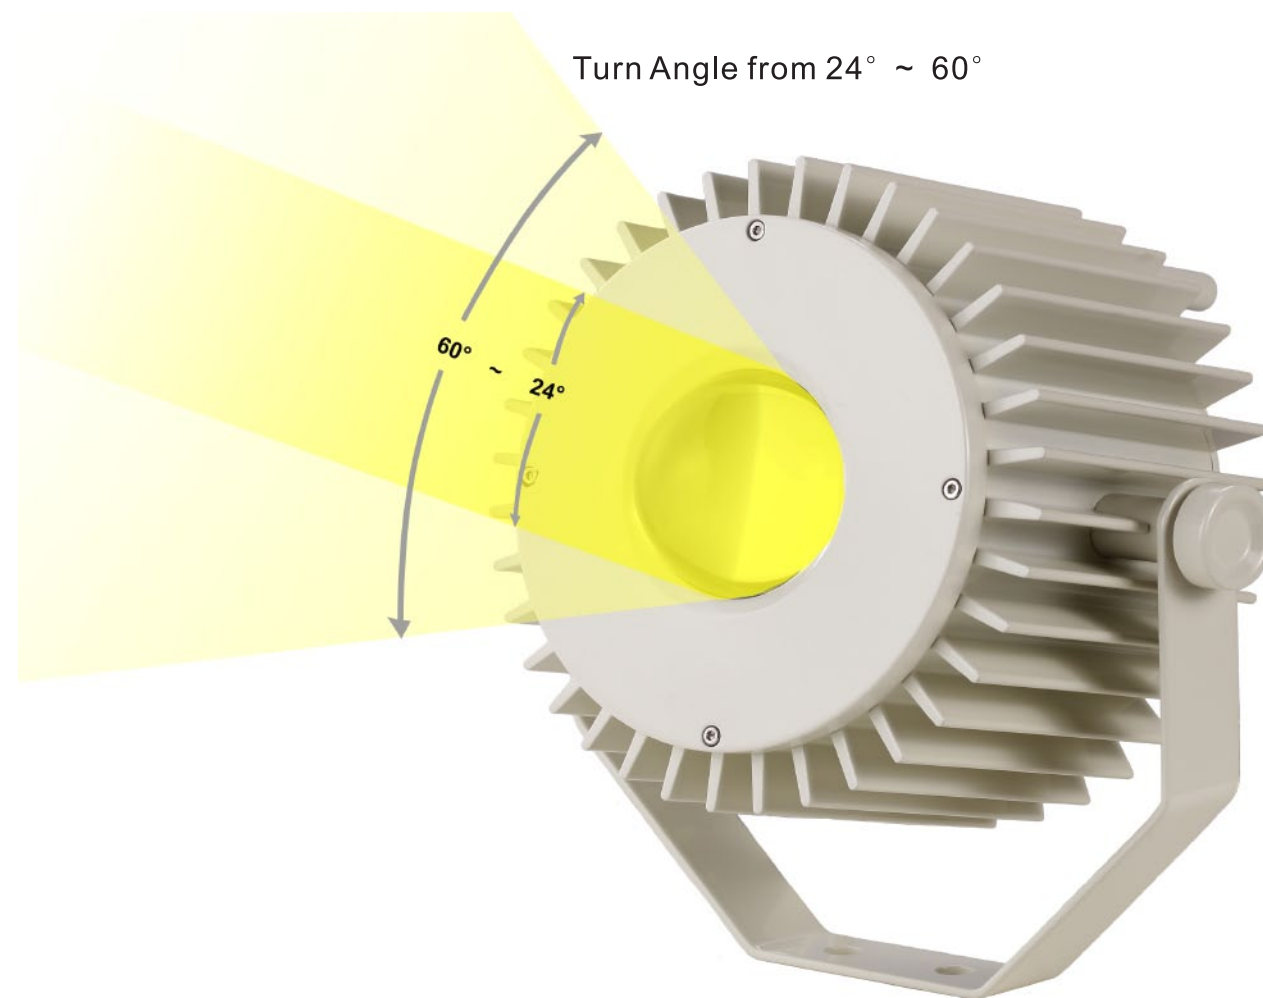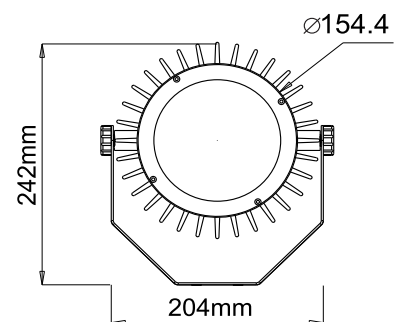

## SDE-003K

50W/70W



Dimmable

Operational Voltage: AC85V~265V

Color Temperature: 2800K~5000K




CRI: Ra=67~80

Intensity of Light Output: 3300lm~5800lm

Rating: IP66

Beam Angle Range: 24° ~ 60°

White Silver Black

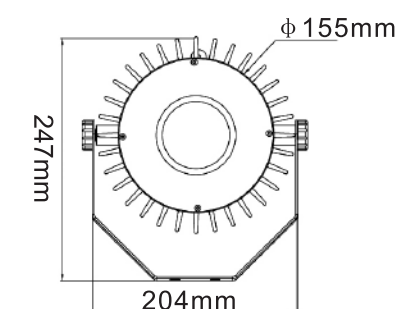



# LED Highbay/Lowbay



high bay



SDO-001

60W/80W/100W

CE

RoHS

Dimmable


26°

38°

44°

120°

Operational Voltage:AC85V~265V  
Color Temperature:2800K~5000K  
CRI:Ra=67~80  
Intensity of Light Output: 2840lm~6600lm  
Rating: IP64

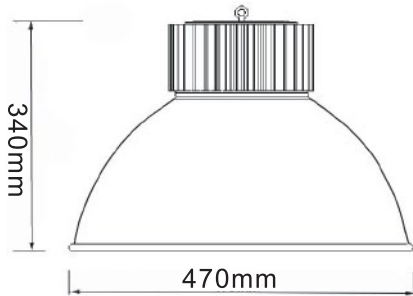

SDO-002

150W/200W


CE

RoHS

Dimmable

120°

Operational Voltage:AC85V~265V  
Color Temperature:2800K~5000K  
CRI:Ra=67~80  
Intensity of Light Output:7800lm~18000lm  
Rating: IP64

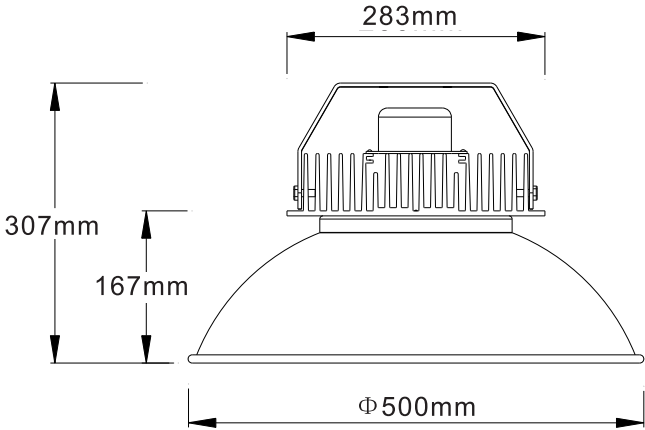

high bay



# LED Bulbs



Aluminum Body



SDB-018

6W/8W



Dimmable

Operational Voltage: AC85V~265V


Color Temperature: 2800K~5000K

CRI: Ra=67~80

Intensity of Light Output: 320lm~520lm

Rating: IP64

Base: E26/E27/B22

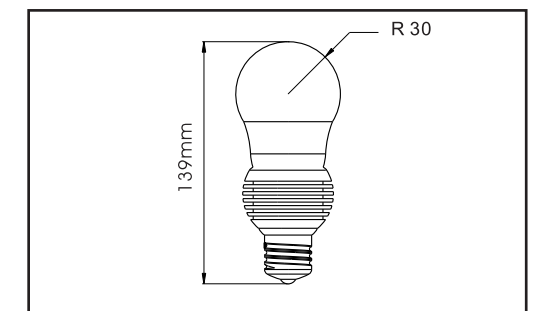

SDB-019

6W/8W



Dimmable

Operational Voltage: AC85V~265V


Color Temperature: 2800K~5000K

CRI: Ra=67~80

Intensity of Light Output: 320lm~640lm

Rating: IP64

Base: E26/E27/B22

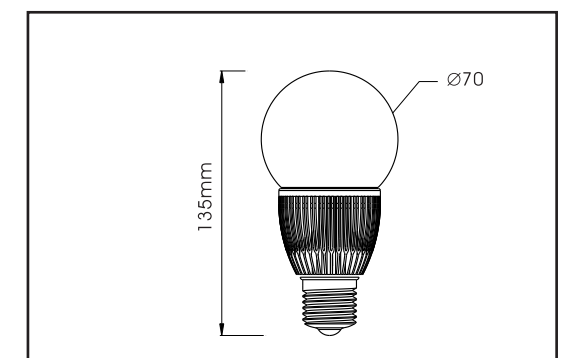





### SDB-020

6W/8W



Dimmable

Operational Voltage: AC85V~265V


Color Temperature: 2800K~5000K

CRI: Ra=67~80

Intensity of Light Output: 320lm~620lm

Rating: IP64

Base: E26/E27/B22

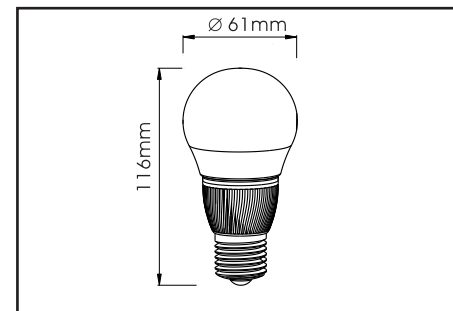

### SDB-022

6W



Dimmable

Operational Voltage: AC85V~265V


Color Temperature: 2800K~5000K

CRI: Ra=67~80

Intensity of Light Output: 210lm~320lm

Rating: IP64

Base: E26/E27/B22

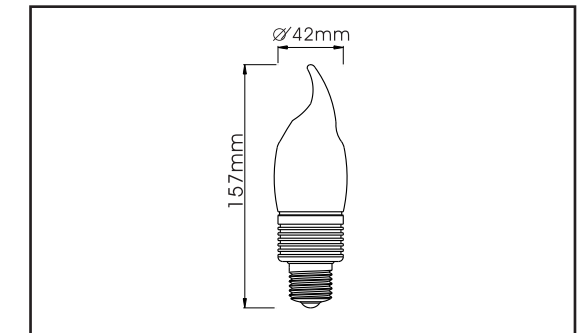

### SDB-021

6W



Dimmable

Operational Voltage: AC85V~265V


Color Temperature: 2800K~5000K

CRI: Ra=67~80

Intensity of Light Output: 210lm~320lm

Rating: IP64

Base: E26/E27/B22

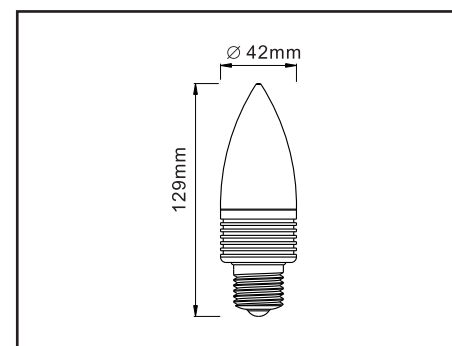

### SDB-023

5W



Dimmable



Operational Voltage: DC12V~24V


Color Temperature: 2800K~5000K

CRI: Ra=67~80

Intensity of Light Output: 280lm~430lm

Rating: IP64

Base: GU5.3

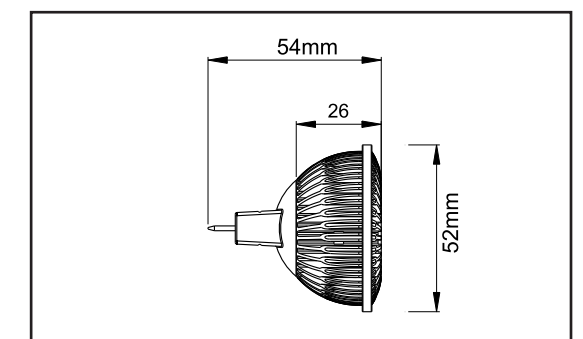





SDB-024


5W



Dimmable



Operational Voltage:AC85V~265V  
Color Temperature:2800K~5000K  
CRI:Ra=67~80  
Intensity of Light Output:280lm~430lm  
Rating: IP64  
Base:GU10

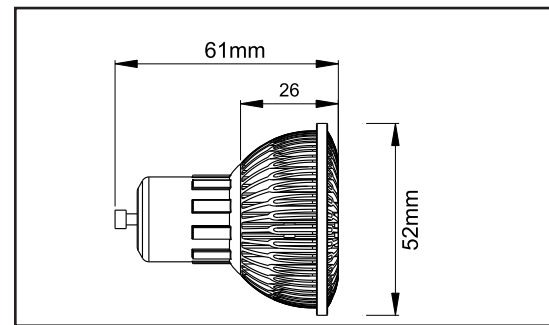

SDB-026


18W



Dimmable



Operational Voltage:AC85V~265V  
Color Temperature:2800K~5000K  
CRI:Ra=67~80  
Intensity of Light Output:870lm~1210lm  
Rating: IP64  
Base:E26/E27

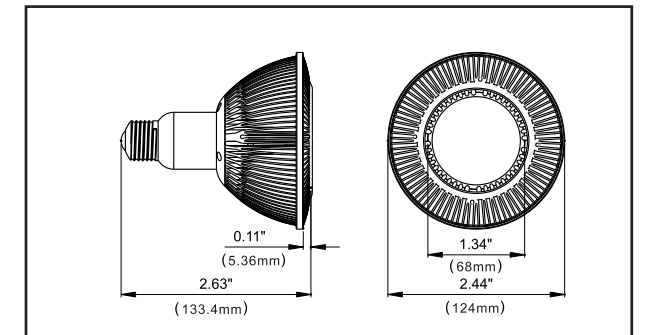


SDB-025


17W



Dimmable



Operational Voltage:AC85V~265V  
Color Temperature:2800K~5000K  
CRI:Ra=67~80  
Intensity of Light Output:750lm~960lm  
Rating: IP64  
Base:E26/E27

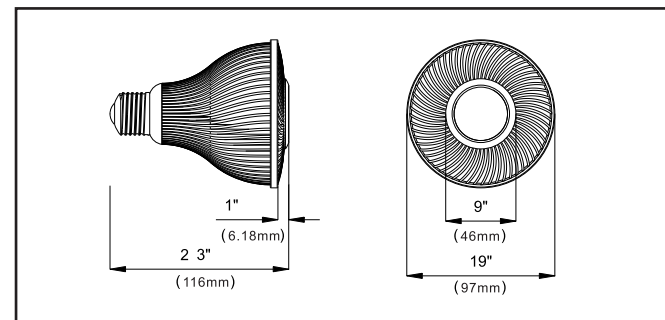

SDB-027

6W/8W



Dimmable

Operational Voltage:AC85V~265V  
Color Temperature:2800K~5000K  
CRI:Ra=67~80  
Intensity of Light Output:420lm~880lm  
Rating: IP64  
Base:E26/E27

