


**TRUE NEXT GENERATION LED TUBE**

**The latest solution - T5 LED tube**

**15W 1.2m T5 1500lm**

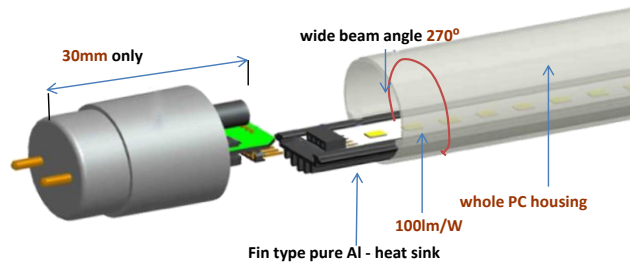

	1st version-Fluorescent T5	2nd version- T5 LED tube	3rd version - T5 LED tube
Apperance:	Glass tube	Al+PC	PC housing
Beam angle:	360°	120°	270°
Watts:	28W	15W	15W
Efficacy:	55lm/W	85lm/W	100lm/W
Lumen:	1600lm	1300lm	1500lm
CRI:	80Ra	70Ra	80Ra
IP rate:	IP42	IP42	IP65

- Quick, simple and safe replacement with LED starter
- Full 360 degree impact resistant polycarbonate tube with no exposed metal
- Energy savings of up to 60 % (compared to T8 fluorescent lamp)
- New and most efficient 2835 LED provide superier light performance at 110Lm/W
- Only 270 degrees beam angle tube available on the market today
- IP65 protection level for use in damp conditions
- Super reliable plug and play construction with no internal wiring
- Full 3 years replacement warranty
- LED chip SMD2835 model No: MS-A2835LWARX2-SF03
- At Lighting Technologies we strive for the best, brightest value for money products

**Technical Data**

**Electrical Data**

Nominal wattage	15W
Nominal voltage	110-277V
Operating frequency	50/60 Hz
Power factor	0.9


**Light Technical Data**

Color temperature	3000K	4000K	6000K
Luminous flux	1400Lm	1500Lm	1500Lm
Beam angle	270D		
Color rendering index Ra	80		

**Dimensions & Weight**

Diameter	L1,200mm * φ16mm
Product weight	180g

**Physical Dimensions**



**Temperature**

Ambient temperature range	-20+50°C
---------------------------	----------

**Logistical Data**

Part No.	Inner Box	Outer Box (20pcs)	Weight
LTA-PLBT-T5-1200-15W	Ø18 x 1,215mm	1,250 x 200 x 160mm	12,0KG