


TRUE NEXT GENERATION LED TUBE

The latest solution - T8 LED tube

20W 1.2m T8 2000lm

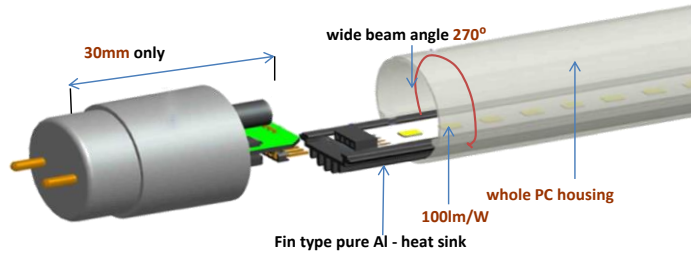

	1st version-Flourescent T8	2nd version- T8 LED tube	3rd version - T8 LED tube
Apperance:	Glass tube	Al+PC	PC housing
Beam angle:	360°	120°	270°
Watts:	36W	20W	20W
Efficacy:	55lm/W	85lm/W	100lm/W
Lumen:	2200lm	1800lm	2000lm
CRI:	80Ra	70Ra	80Ra
IP rate:	IP42	IP42	IP65

Quick, simple and safe replacement with LED starter
 Full 360 degree impact resistant polycarbonate tube with no exposed metal
 Energy savings of up to 60 % (compared to T8 fluorescent lamp)
 New and most efficient 2835LED provide superior light performance at 110Lm/W
 Only 270 degrees beam angle tube available on the market today
 IP65 protection level for use in damp conditions
 Super reliable plug and play construction with no internal wiring
 Full 3 years replacement warranty
 LED chip SMD2835 model No: MS-A2835LWARX2-SF03
 At Lighting Technologies we strive for the best, brightest value for money products

Technical Data

Electrical Data	
Nominal wattage	20W
Nominal voltage	110-277V
Operating frequency	50/60 Hz
Power factor	0.9


Light Technical Data

Color temperature	3000K	4000K	6000K
Luminous flux	1900Lm	2000Lm	2000Lm
Beam angle	270D		
Color rendering index Ra	80		

Dimensions & Weight

Diameter	L1200mm * φ26mm
Product weight	500g

Physical Dimensions

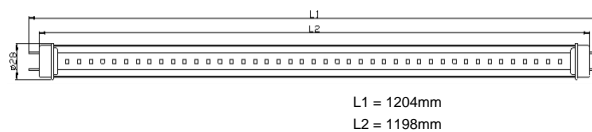

Temperature

Ambient temperature range	-20+50°C
---------------------------	----------

Logistical Data

Part No.	Inner Box	Outer Box (20pcs)	Weight
LTA-PLBT-T8-1200-20W	Ø37 x 1,215mm	1250 x 200 x 160mm	12,0KG